



www.as-schwabe.de

FIXO

wall-mounted power combination units

POWER COMBINATION UNITS FOR WORKSHOP, CELLAR AND GARAGE



**Models prepared for
hard-wire connection**
with openings for connection
of sheathed cables NYM-J
5x1.5 to 5x16
(depending on model)



Models with mounted plug
for operation with standard
extension with CEE connector

Inputs/plugs



Main cable
branch terminal



CEE plug
400 V, 16 A, 5-pole



CEE plug
400 V, 32 A, 5-pole

Outputs/sockets



Shock-proof socket
outlet



CEE socket
400 V, 16 A, 5-pole



CEE socket
400 V, 32 A, 5-pole



2 USB sockets
5 V, 2.1 A

Protection



RCD 40 A, 4-pole, 30 mA, type A

MCB C 16 A, 3-pole

FI/RCD MCB C 16 A, 1-pole



FIXO

wall-mounted power combination



Combination units in different versions

The FIXO Series of power combination units are designed for **wall mounting** and are available in various configurations. Depending on the FIXO model, **different numbers of sockets for shock-proof, CEE and/or USB plugs** are installed. All sockets have self-locking flap lids.

Protection

The sockets are protected **with RCD and MCB**. All circuit breakers are installed behind a transparent plastic self-locking flap lid where they are visible and accessible at any time.

Two connection variants

A distinction is made between two connection variants of FIXO combination unit. Ready-to-use models have a **panel-mounted plug** for direct connection to the power supply. The second variant of FIXO combination units is **prepared for hard-wired connection** of NYM cables.

Use in damp rooms

All models are **protected against foreign bodies and splash-proof**, satisfying protection class **IP44**.

They are therefore ideally suited for use in workshops, garages, halls or cellars. All FIXO models are suitable for both indoor and outdoor use.

Wall mounting

For constant use, the combination unit is permanently mounted on the wall. **Drill markings** on the rear of the housing simplify installation. For temporary use, the combination unit can alternatively be screwed to the wall using the **holes in the handle**.

FIXO combination units

prepared for hard-wired connection
of cables up to 5x16



Main cable branch terminal

A high-quality, sturdy terminal is installed to ensure a long-term and reliable electrical installation.



Protective devices and cables

RCD and MCB



Shock-proof socket outlets,

two each split between one phase
230 V/16 A



CEE socket

400 V / 16 A / 5-pole



CEE socket

400 V / 32 A / 5-pole




2 USB sockets

5 V / 2.1 A



Direct connection

Two openings on the upper side of the housing for connection of 5x1.5 to 5x16 NYM-J cables (depending on the model), including two stepped nipples for sealing the connected cable.

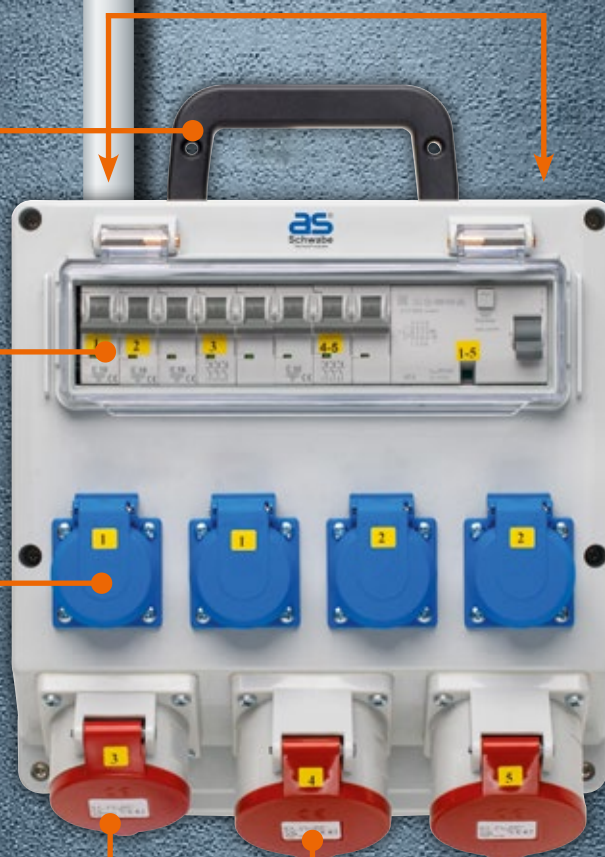

Robust
plastic housing



Rear view

with marks for drill holes
for wall attachment

FIXO combination units

prepared for hard-wired connection of cables



Technical data

- Robust housing made from shatterproof special plastic, including carry handle
- Compact construction ideal for wall attachment
- With high-quality, sturdy main cable branch terminal for electrical installations
- Including two stepped nipples for sealing the cable
- FIXO housing dimensions: 280 x 280 x 118 mm
FIXO MAX housing dimensions: 370 x 375 x 118 mm
- Tested in accordance with DIN EN 61439-3
- **IP44:** protected against foreign bodies and splash-proof

All models are
wired ready for connection.
Hinges on the lid ensure that it
can be opened when connected
and does not just hang down.



FIXO 10D

Prepared for hard-wired connection of
NYM-J up to max. 5x6

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

4x shock-proof socket outlets 230 V, 16 A
3x CEE socket 400 V, 16 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA,
type A
2x MCB C 16 A, 1-pole
2x MCB C 16 A, 3-pole



EAN 4011160615184
Art. no. 61518



FIXO 11D

Prepared for hard-wired connection of
NYM-J up to max. 5x10

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

4x shock-proof socket outlets 230 V, 16 A
2x CEE socket 400 V, 16 A, 5-pole
1x CEE socket 400 V, 32 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA,
type A
2x MCB C 16 A, 1-pole
1x MCB C 16 A, 3-pole



EAN 4011160615139
Art. no. 61513



FIXO 12D

Prepared for hard-wired connection of
NYM-J up to max. 5x10

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

4x shock-proof socket outlets 230 V, 16 A
1x CEE socket 400 V, 16 A, 5-pole
2x CEE socket 400 V, 32 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA,
type A
2x MCB C 16 A, 1-pole
1x MCB C 16 A, 3-pole



EAN 4011160615191
Art. no. 61519



FIXO 13D MAX

Prepared for hard-wired connection of
NYM-J up to max. 5x10

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

6x shock-proof socket outlets 230 V, 16 A
4x CEE socket 400 V, 16 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA,
type A
3x MCB C 16 A, 1-pole



EAN 4011160615153
Art. no. 61515



FIXO 14D MAX

Prepared for hard-wired connection of
NYM-J up to max. 5x10

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

5x shock-proof socket outlets 230 V, 16 A
1x CEE socket 400 V, 16 A, 5-pole
1x CEE socket 400 V, 32 A, 5-pole
2x USB sockets 5 V / 2.1 A



Protection

1x RCD 40 A, 4-pole, 30 mA,
type A
3x MCB C 16 A, 1-pole
2x MCB C 16 A, 3-pole
1x MCB C 32 A, 3-pole



EAN 4011160615252
Art. no. 61525



FIXO 15D MAX

Prepared for hard-wired connection of
NYM-J up to max. 5x16

Two knockouts for universal cable
glands, including stepped nipple for
sealing the connected cable.

Output

5x shock-proof socket outlets 230 V, 16 A
2x CEE socket 400 V, 16 A, 5-pole
2x CEE socket 400 V, 32 A, 5-pole
2x USB sockets 5 V / 2.1 A



Protection

1x RCD 63 A, 4-pole, 30 mA,
type A
3x MCB C 16 A, 1-pole
1x MCB C 16 A, 3-pole



EAN 4011160615269
Art. no. 61526





FIXO combination units

with panel-mounted plug for connection to the power supply

Robust plastic housing

Sturdy handle

Quick hanging for short-term applications

Protective devices and cables

RCD and MCB

Shock-proof socket outlets,

two each split between one phase 230 V/16 A

CEE socket

400 V / 16 A / 5-pole

CEE socket

400 V / 32 A / 5-pole

2 USB sockets

5 V / 2.1 A

Rear view

with drill markings for wall attachment

Panel-mounted plug

for operation with standard extension with CEE connector



FIXO combination units



Technical data

- Robust housing made from shatterproof special plastic, including carry handle
- Compact construction, ideal for wall attachment
- FIXO housing dimensions: 280 x 280 x 118 mm
FIXO MAX housing dimensions: 370 x 375 x 118 mm
- Tested in accordance with DIN EN 61439-3
- **IP44**: protected against foreign bodies and splash-proof

All models are
wired ready for connection.
Hinges on the lid ensure that it can be
opened when connected and does not just
hang down.



FIXO 1	Input 16 A , approx. 11 kW	Output	Protection	
	CEE plug 400 V, 16 A, 5-pole	4x shock-proof socket outlets 230 V, 16 A 2x CEE sockets 400 V, 16 A, 5-pole 	1x RCD 40 A, 4-pole, 30 mA, type A 2x MCB B 16 A, 1-pole EAN 4011160615221 Art. no. 61522	
FIXO 2 MAX	Input 16 A , approx. 11 kW	Output	Protection	
	CEE plug 400 V, 16 A, 5-pole	6x shock-proof socket outlets 230 V, 16 A 3x CEE sockets 400 V, 16 A, 5-pole 	1x RCD 40 A, 4-pole, 30 mA, type A 3x MCB B 16 A, 1-pole EAN 4011160615146 Art. no. 61514	
FIXO 3	Input 32 A , approx. 22 kW	Output	Protection	
	CEE plug 400 V, 32 A, 5-pole	4x shock-proof socket outlets 230 V, 16 A 2x CEE sockets 400 V, 16 A, 5-pole 	1x RCD 40 A, 4-pole, 30 mA, type A 2x MCB C 16 A, 3-pole 2x MCB C 16 A, 1-pole EAN 4011160615177 Art. no. 61517	
FIXO 4	Input 32 A , approx. 22 kW	Output	Protection	
	CEE plug 400 V, 32 A, 5-pole	4x shock-proof socket outlets 230 V, 16 A 1x CEE socket 400 V, 16 A, 5-pole 1x CEE socket 400 V, 32 A, 5-pole 	1x RCD 40 A, 4-pole, 30 mA, type A 1x MCB C 16 A, 3-pole 2x MCB C 16 A, 1-pole EAN 4011160615122 Art. no. 61512	
FIXO 5 MAX	Input 32 A , approx. 22 kW	Output	Protection	
	CEE plug 400 V, 32 A, 5-pole	5x shock-proof socket outlets 230 V, 16 A 3x CEE sockets 400 V, 16 A, 5-pole 2x USB sockets 5 V / 2.1 A 	1x RCD 40 A, 4-pole, 30 mA, type A 3x MCB C 16 A, 3-pole 3x MCB C 16 A, 1-pole EAN 4011160615238 Art. no. 61523	
FIXO 6 MAX	Input 32 A , approx. 22 kW	Output	Protection	
	CEE plug 400 V, 32 A, 5-pole	5x shock-proof socket outlets 230 V, 16 A 2x CEE sockets 400 V, 16 A, 5-pole 1x CEE socket 400 V, 32 A, 5-pole 2x USB sockets 5 V / 2.1 A 	1x RCD 40 A, 4-pole, 30 mA, type A 2x MCB C 16 A, 3-pole 3x MCB C 16 A, 1-pole EAN 4011160615245 Art. no. 61524	



FIXO

wall-mounted power combination units

For use in workshop, garage and cellar

- ✓ With knockouts and stepped nipples **for hard-wired connection** of cables **or with panel-mounted plug** for operation with standard extension with CEE connector
- ✓ All models fitted with high-quality **personal protection and MCBs**
- ✓ Sockets and circuit breakers protected by **self-locking flap lid (IP44)**
- ✓ **Simple wall mounting** thanks to drill markings on the rear of the sturdy housing

Your partner for professional lighting and electrical products.

as - Schwabe GmbH Merkurstraße 10 D - 72184 Eutingen Tel. +49 7457 9 48 53 10 d.mueck@as-schwabe.de www.as-schwabe.de

#74, as at 1/2023. Errors and modifications reserved. Reproduction only with the authorisation of as - Schwabe GmbH.

as[®]
Schwabe
TechnikProdukte